


Sanitary Drum Transfer Pumps

SP-8600 / SP-8700 SERIES

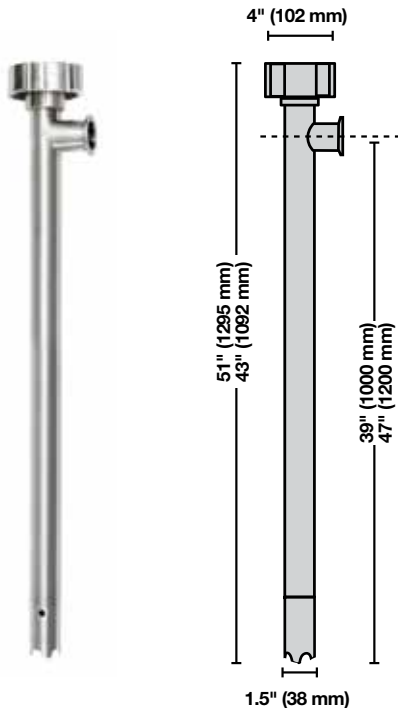

8600 Series

MODEL	TUBE ASSEMBLY	BUSHING	IMMERSION LENGTH	IMPELLER	SHIPPING WT lbs (kg)
SP-8600-39	SS316	PTFE	39" (1000 mm)	High Volume	12.0 (5,5)
SP-8600-47	SS316	PTFE	47" (1200 mm)	High Volume	14.0 (6,4)

8700 Series


MODEL	TUBE ASSEMBLY	BUSHING	IMMERSION LENGTH	IMPELLER	SHIPPING WT lbs (kg)
SP-8700-39	SS316	PTFE	39" (1000 mm)	High Pressure	12.0 (5,5)
SP-8700-47	SS316	PTFE	47" (1200 mm)	High Pressure	14.0 (6,4)

Technical Specifications

Immersion Length: 39" (1000 mm) Drums
 47" (1200 mm) Totes, Tanks and Kettles
Wetted Components:SS316L, Teflon & Buna
Motor Drive:SP-280P, SP-ENC, SP-A1, SP-A2
Discharge Size: 1.5" Tri-Clamp /
 Optional 1" Tri-Clamp Hose Barb

Maximum Viscosity:1,000 cps (mPAS)*
Maximum Discharge Pressure: 43 psi (2,9 bar)
Maximum Flow Rate:35 GPM (132 LPM)
Pump Weight: 11 lbs (5 kg)
Maximum Temperature:175° F (80° C)

Flow Curves

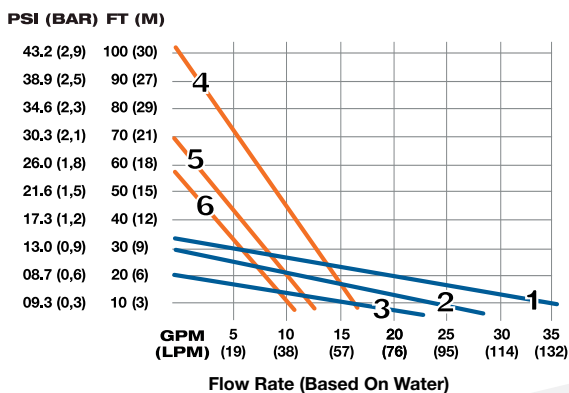

KEY:

- 1 SP-280P, SP-ENC / 8600 Pump Tube
- 2 SP-A2 / 8600 Pump Tube
- 3 SP-A1 / 8600 Pump Tube
- 4 SP-280P, SP-ENC / 8700 Pump Tube
- 5 SP-A2 / 8700 Pump Tube
- 6 SP-A1 / 8700 Pump Tube



Toll Free: 1-866-558-8611
 Tel 770-307-1003

www.standardpump.com

Note: Pump is constructed with FDA compliant materials; however, the pump does not have FDA certification.

*Pump is intended for intermittent use when operating at maximum viscosity.